

SUNFORGE

VULCAIN SERIES

700~735W

Heterojunction



HJT
TECHNOLOGY



Independent **TRIPLE**
Quality Control
by **Greenwire**



Reinsurance
by **Ariel Re**



23.7% Max efficiency
95% Bifaciality
ZBB Technology

SUNFORGE

Office : 202, Jinxiu Building N°33, Lane 672, Changle Road, Jing'an District, Shanghai
Factory: Room 301, Building 1, No. 1835-1855, Jiasong Middle Road,
Qingpu District, Shanghai


contact@sunforgetech.com

+86 21 5410 6230

www.sunforgetech.com

Engineering Drawings

Unit: mm

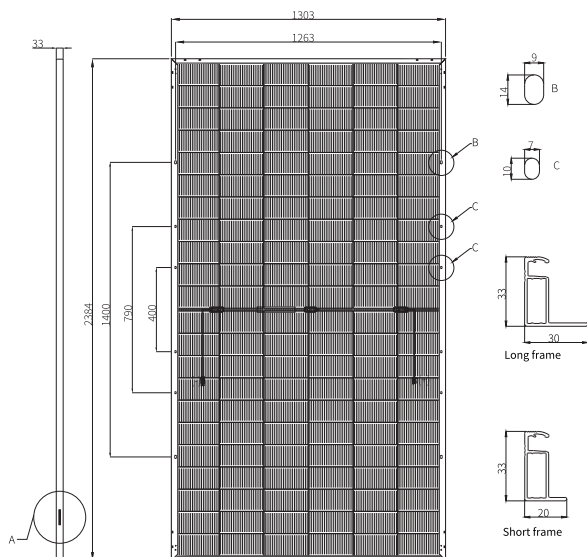

Mechanical Characteristics

Cell Type	Heterojunction ZBB
No. of Cells	132 (6x22)
Dimensions	2384x1303x33mm
Weight	37.9 kg
Junction Box	IP68
Cabel	4mm ² ;1500mm or customized; UV resistant
Choice	MC4 / MC4-Evo2 / MC4-Evo2A / PV-H4 / Z4S-abcd / PV-ZH202B
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

Temperature Characteristics

Temperature Coefficient of Pmax	-0.24%/ °C
Temperature Coefficient of Voc	-0.22%/ °C
Temperature Coefficient of Isc	+0.04%/ °C

Front & back glass

2x2mm

Cable Length

1500mm


High Moisture
Resistant Sealant

PIB

EVO2 connectors

MC4 STAUBLI

I-V Curve

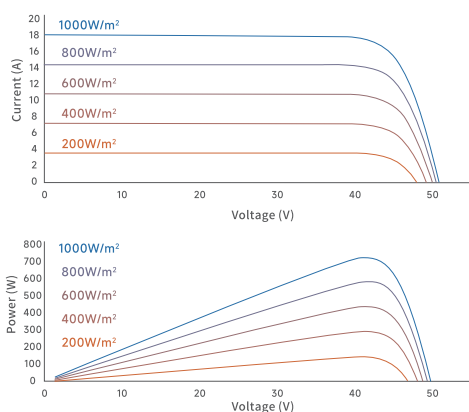

Electrical Characteristics

STC

Reference Number	SF-210-BH132D5700	SF-210-BH132D5705	SF-210-BH132D5710	SF-210-BH132D5715	SF-210-BH132D5720	SF-210-BH132D5725	SF-210-BH132D5730	SF-210-BH132D5735
Maximum Power (Pmax/W)	700	705	710	715	720	725	730	735
Module Efficiency (%)	22.5	22.7	22.9	23.0	23.2	23.3	23.5	23.7
Maximum Power Voltage (Vmp/V)	41.78	41.87	41.96	42.05	42.14	42.23	42.32	42.41
Maximum Power Current (Imp/A)	16.76	16.84	16.93	17.02	17.10	17.18	17.26	17.34
Open Circuit Voltage (Voc/V)	49.77	49.87	49.97	50.07	50.17	50.27	50.37	50.47
Short Circuit Current (Isc/A)	17.81	17.90	17.99	18.08	18.17	18.26	18.35	18.44

STC: AM1.5, 1000W/m², 25°C.

BNPI

Maximum Power (Pmax/W)	785	790	796	801	807	813	818	824
Maximum Power Voltage (Vmp/V)	41.92	42.02	42.11	42.20	42.29	42.38	42.47	42.56
Maximum Power Current (Imp/A)	18.73	18.82	18.91	19.00	19.10	19.19	19.28	19.37
Open Circuit Voltage (Voc/V)	49.94	50.04	50.14	50.24	50.34	50.44	50.54	50.65
Short Circuit Current (Isc/A)	19.97	20.07	20.18	20.28	20.38	20.48	20.58	20.68

BNPI: AM1.5, 1000W/m², 135W/m², 25°C.

NOCT

Maximum Power (Pmax/W)	534	538	542	545	549	553	557	561
Maximum Power Voltage (Vmp/V)	39.90	40.00	40.07	40.14	40.23	40.32	40.41	40.50
Maximum Power Current (Imp/A)	13.39	13.46	13.53	13.60	13.67	13.73	13.79	13.86
Open Circuit Voltage (Voc/V)	47.50	47.60	47.69	47.79	47.88	47.98	48.08	48.17
Short Circuit Current (Isc/A)	14.23	14.31	14.38	14.45	14.52	14.59	14.67	14.74

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	35A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

Packing

40HQ

Modules Per Pallet	33
Pallets Per Container	18
Modules Per Container	594